
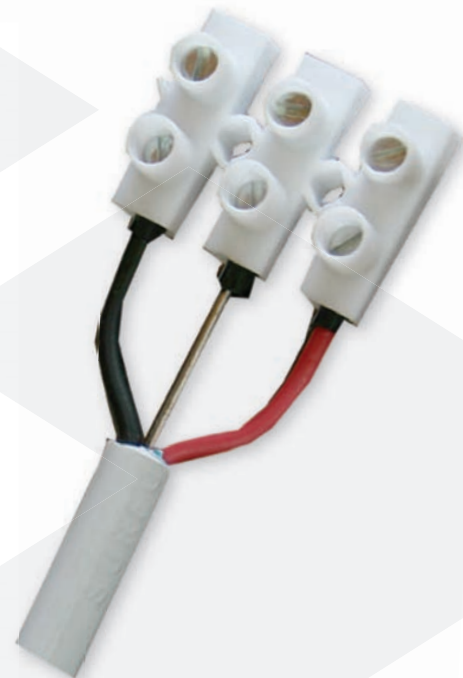


STRIP CONNECTORS

Waco's new improved design for easy wire entry.

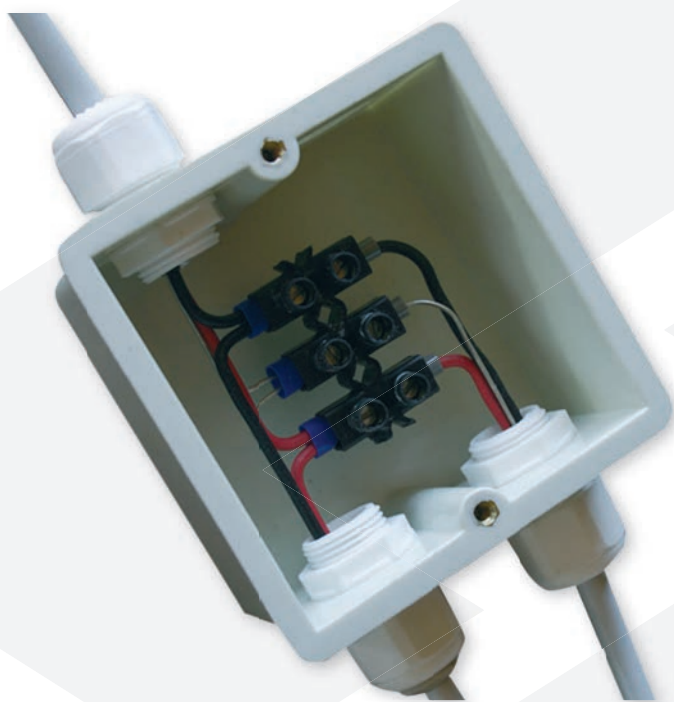

TECHNICAL SPECIFICATIONS

Nominal voltage		450V
Clamping range	EKL 0S	1 - 4mm ²
	EKL 1S	1.5 - 6mm ²
	EKL 2S	2.5 - 10mm ²
Wire skinning length	EKL 3S	4 - 16mm ²
	EKL 0S	5 + 1mm
	EKL 1S	6 + 1mm
Max.ambient temperature	EKL 2S	7.5 + 1mm
	EKL 3S	8.5 + 1mm
	EN 60998	T80
Material	Terminal housing	Polypropylene
	Inserts	Tinned steel
	Screws	Galvanized steel

PRODUCT BENEFITS:

- Approved for flexible wires without wire protection
- Stable torque carrying capacity
- Established temperature rating
- Complies with requirements: SABS and EN 60998-1:2004 & EN 60998-2-1:2004



K8 codes	Ways	Colour	Packing	Amps	W	H	D	Mounting Holes
H0002490	12	White	50 x 10	3	94.9	13	16.6	2.65
H0002489	12	Black	50 x 10	3	94.9	13	16.6	2.65
H0002497	12	White	25 x 10	6	116.5	14.9	18.9	3.4
H0002496	12	Black	25 x 10	6	116.5	14.9	18.9	3.4
Y0022591	12	White	25 x 10	16	133.8	17.3	23.4	3.7
H0002503	12	Black	25 x 10	16	133.8	17.3	23.4	3.7
H0002506	12	White	10 x 10	32	174.5	20.7	25	4.9
H0002505	12	Black	10 x 10	32	174.5	20.7	25	4.9
H0002507	12	Black	10 x 5	63	187.3	28	30	

**Also available in Hi-Heat (white only)
Full range as above**

EASY TO DIVIDE

Twist & Pull

